

Conflict-Free Automated Guided Vehicles Routing Using Multi-Objective Genetic Algorithm

¹U.A. Umar, ²M.K.A. Ariffin, ³N. Ismail and ⁴S.H. Tang

Department of Mechanical and Manufacturing Engineering, Universiti Putra Malaysia
43400 UPM Serdang, Malaysia

Abstract: The study presents an algorithm for conflict-free Automated Guided Vehicle (AGV) routing minimizing travel time and total job tardiness. The problem is represented using one sub-chromosome for dispatching represented with random keys and the remaining sub-chromosomes for routing represented with priority-based encoding. The algorithm used weight mapping crossover (WMX) and Insertion Mutation (IM) for priority-based representation and parameterized uniform crossover (PUX) for random-key based representation. Conflict is detected and avoided using the route occupation time of each segment. Numerical experiment was conducted on the developed algorithm.

Keywords: Automated Guided Vehicle (AGV), dispatching, multi-objective genetic algorithm, metaheuristics, optimization, routing

INTRODUCTION

In line with the immense need of inventive production strategies to reduce cost and improve overall system throughput, adoption and continues improvement of material transport system is now a reality. Automated Guided Vehicle (AGV) system provides a more flexible, cost effective and convenient means of automated material transportation system. Ineffective and inefficient AGV routing algorithms directly affect the overall system which may result in the total system malfunction (Le-Anh and De Koster, 2006; Vis, 2006). AGV routing problem is found to be NP complete problem (De Guzman *et al.*, 1997). This study presents algorithms for dynamically optimizing automated guided vehicle material handling tasks and related overall system throughput using multi-objective genetic algorithm.

Routing algorithm of automated guided vehicle can be categorized as either static or dynamic. Static routing algorithm provides routing paths mapping to space domain only, while the dynamic routing algorithms provides routing path mapping in both time and space domain (Smolic-Rocak *et al.*, 2010). With static routing algorithms the path from origin to destination is determined in prior to the request and used at all times if a material will be transported to a particular destination. Therefore, the criteria used to choose path is usually the shortest distance route. Static routing algorithm in the literature includes (Kim and Tanchoco, 1991; Krishnamurthy *et al.*, 1993). However, static algorithms are not capable in considering real time traffic control functions. In dynamic routing traffic control decision utilizes the real-time information, gave

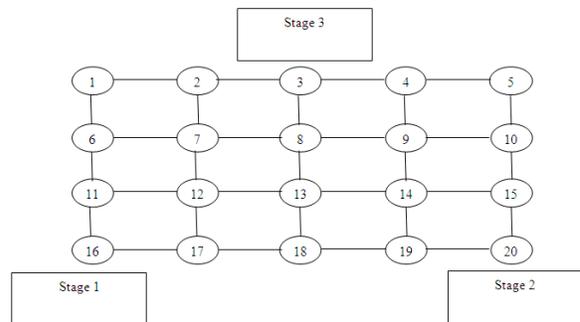


Fig. 1: Production facility layout

rise to choice of different route usually from the particular origin to a particular destination.

Problem formulation: The manufacturing facility layout is represented by an undirected graph $G = (N, A)$. The set of nodes $N = \{n_1, n_2, n_3, \dots\}$ represent production stages and intersection of paths, while the sets of weighted arcs $A = \{a_1, a_2, a_3, \dots\}$ represent the routes between corresponding nodes:

P_v represent current path, Am represent the graph network adjacency matrix, E represents Eligible edge set and m the total jobs

Let the weight w_{ij} of the arc between node i and j represents the inverse of arc occupation time which is given by the following relation:

$$w_{ij} = \frac{V_c}{d_{ij}} \tag{1}$$

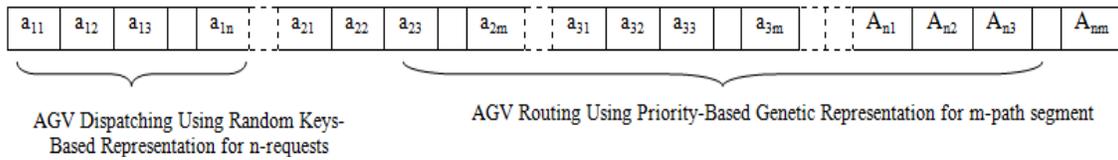


Fig. 2: Genetic Representation Used

```

Generate initial population
Decode
Evaluate
While (n less than Max Gen) do
Crossover Pn to get Cn using PMX
Crossover P1... Pn to get C1...Cn using WMX
Mutate P1... Pn to get C1...Cn using IM
Decode P1... Pn to get C1...Cn
Evaluate Pn & Cn using multi-objective Function
Select Pn+1 from Pn & Cn
n=n+1
End_
Compare arc and node occupation time
Select conflict free node with highest fitness
Output the best solution.
    
```

Fig. 3: Pseudocode multi-objective genetic algorithm

where, d_{ij} is the length of the arc, V_c is the speed of the AGV which is assumed to be constant throughout the transverse time.

Assumptions

The speed of the AGV is constant. Each AGV serve only one request at a specific time instance. The capacity of each buffer is sufficient to accommodate material at both production stages.

The production facility layout used for experimenting the developed algorithm as used by Nishi *et al.* (2011) is shown in Fig. 1.

Multi-objective genetic algorithm: Single-objective optimization is a condition where the superiority of individual solution in search space is determined by its performance toward only one objective. Other desired features can be archived by using a set of constraints before fitness evaluation or by repair process after the problem is solved. Real world problem usually need considerations of multiple objectives to get real optimum solution. In practice the objectives is often reduced to a single objective for convenience. In order to obtain better solution to a particular problem multi-objective optimization is used. Multi-criteria or multi-objective optimization utilizes two or more usually conflicting objective to evaluate the fitness of the individual solutions in the search space. Constraints can be incorporated by using equality and inequality constrains equations for decisions variables involved. Optimum solution from the all objectives involved is

obtained by trade-offs between the objectives features that are usually conflicting (Deb, 2008).

Choosing a proper genetic representation for a problem is very fundamental and success determining step toward superbly solving a particular optimization problem. Inappropriate representations normally leads to no or incorrect solution to the problem at hand. Considering the nature of AGVs integrated routing which needs representing AGVs dispatching and detail path routing. Considering the fact that indiscriminate combination of nodes usually result in illegal or infeasible route and random dispatching result in overload, this study choose priority-based genetic algorithm for routing and random-key based representation for dispatching. Figure 2 shows the chromosomes representation with one sub chromosomes in random key-based representing the AGVs dispatching for n request and the remaining sub chromosomes priority-based representing detail AGV route for each of the n dispatched request. For more details about the representation used the reader is referred to Bean (1994), Gen *et al.* (1997) and Umar *et al.* (2012).

Let P_n be the parent for generation n and P_{in} be the corresponding sub-chromosomes. Let C_n be the parent for generation n and C_{in} is the corresponding sub-chromosomes. The complete pseudo code for the algorithm used is shown in Fig. 3.

Genetic operators: The algorithm used weight mapping crossover (WMX) developed by Gen *et al.* (1997) for sub-chromosomes represented with priority based encoding of the AGV route. Firstly, to the right segment of the locus interval random point is chosen to divide the genes into left and right segment. The two segments are interchanged between the two parent chromosomes. The offspring chromosomes right segment contains the index mapping of the sorted allele of the right segment of the other parent. The left segment of the generated offspring contains exactly the left segment the corresponding parent. Parameterized Uniform Crossover (PUC) was used for sub-chromosomes represented with random key based representation. In PUC, firstly the chromosome index to choose for crossover based on a randomly generated number is determined, which have same length with that of the sub-chromosomes. This randomly generated

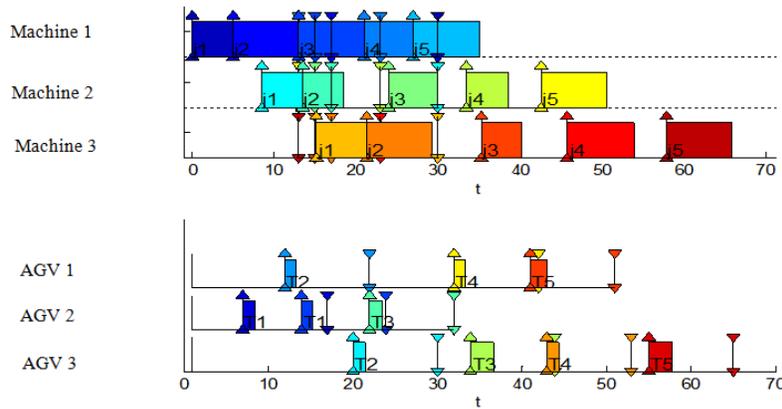


Fig. 4: Gantt chart for Jobs and AGV routing

number is the decision variable for crossover if is greater than 0.7, otherwise the chromosome is left intact without crossover for more detail about the crossover the reader is referred to Bean (1994).

The algorithm used Insertion mutation for sub-chromosomes represented with priority-based representation. Randomly, an index of insertion point and the insertion contain to the right were chosen. The remaining indexes to the right of the insertion point were incremented by one each. Insertion mutation was found to be great toward ensuring exploration in genetic algorithm with priority-based genetic representation (Lin and Gen, 2009).

In order choose the fittest individuals for passage to the next generation the developed algorithm uses multi-objective fitness evaluation function in Eq. (2) to evaluate the individuals in the population:

$$f_{eval} = \min \left(m_1 \sum_{i=1}^n \sum_{j=1}^n w_{ij} x_{ij} + m_2 \sum_{k=1}^m (c_k - d_k) \right) \quad (2)$$

where, w_{ij} is the arc weight, d_k is due date, c_k is the job completion time, m_1 and m_2 are the weight of corresponding objectives. The decision variable x_{ij} is given by the following relation:

$$x_{ij} = \begin{cases} 1, (i, j) \in P_V \\ 0, otherwise \end{cases} \quad (3)$$

Route conflict that may result to deadlock and livelock is detected by using node and arc occupation times. If a conflict is detected the solution is replaced with another solution in the population.

Numerical experiment: Numerical experiment was conducted on a Pentium 4 processor (3.2-GHz), 2MB Memory and running on Window 7 Operating System. The algorithm was written in MATLAB 7.12 using population size of 20 individuals per generation crossover rate of 0.7 for both weighted mapping

crossover and parameterized uniform crossover mutation rate of 0.2. The experiment use data from Nishi *et al.* (2011) with three production stages and three AGVs and five jobs as shown in Fig. 1. The corresponding input data used is presented in Table 1.

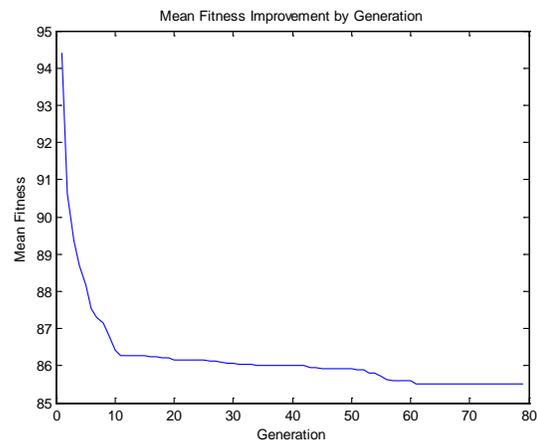


Fig. 5: Population fitness improvement history

Table 1: Production data used

	Job 1	Job 2	Job 3	Job 4	Job 5
Weight	30	17	15	7	3
Due date	30	7	8	23	13
Processing time for stage 1	5	8	8	6	8
Processing time for stage 2	5	5	6	5	8
Processing time for stage 3	6	8	5	8	8

Table 2: AGV routing

	Time (min)		Route	Job
	Start	End		
AGV1	7:00	8:15	3-2-1-6-11-16	Job 2
	32:00	33:15	3-2-1-6-11-16	Job 4
	41:00	42:30	3-2-7-12-17-16	Job 5
AGV2	7:00	8:15	3-2-7-6-11-16	Job 1
	14:00	15:15	16-17-18-19-20	Job 1
	21:15	22:45	3-2-7-12-17-16	Job 3
AGV3	20:00	21:15	16-17-18-19-20	Job 2
	24:00	26:45	16-11-12-7-2-3-8-9-14-15-20	Job 3
	42:30	43:45	16-17-18-19-20	Job 4
	55:00	57:00	3-4-9-14-13-18-17-16	Job 5

times. If a conflict is detected the solution is replaced with another solution in the population.

The algorithm is assumed to converge whenever the selected population is not improving after 20 generation. The result obtained after about 80 generation as shown in the population history plot in Fig. 5. The results obtained is optimum compared with Nishi *et al.* (2011). In addition this study considers another objective of shortest time route apart from job tardiness used in the study. The detail of AGV routing is shown in Table 2. While the gantt chart for scheduling dispatching and routing is shown in Fig. 4.

CONCLUSION

The study proposed a multi-objective genetic algorithm approach to automated guided vehicle system. The optimization algorithm considers shortest time paths and job tardiness as the objectives. The problem is represented in sub-chromosomes structure in which one sub-chromosome is representing dispatching while the remaining representing automated guided vehicle routing. Due to the nature of the two representation used the genetic operators used is distinct for each representation, which in weight mapping crossover (WMX) and Insertion Mutation (IM) for priority-based representation and Parameterized Uniform Crossover (PUC) for random key-based representation. One of the main contributions of this study is the combination of two different objectives in optimizing the automated guided vehicle routing which are treated separately in the literature. The incorporation uncertainty handling into the algorithm will be the future area of research.

ACKNOWLEDGMENT

The study was supported by Research University Grant (9199811) award to Universiti Putra Malaysia.

REFERENCES

Bean, J.C., 1994. Genetic algorithms and random keys for sequencing and optimization. *ORSA J. Comput.*, 6(2): 154-160.

- De Guzman, M.C., N. Prabhu and J.M.A. Tanchoco, 1997. Complexity of the AGV shortest path and single-loop guide path layout problems. *Int. J. Prod. Res.*, 35(8): 2083-2092.
- Deb, K., 2008. *Multi-Objective Optimization Using Evolutionary Algorithms*. John Wiley and Sons, Chichester, New York.
- Gen, M., C. Runwei and W. Dingwei, 1997. Genetic algorithms for solving shortest path problems. *Proceeding of the IEEE International Conference on Evolutionary Computation*. Indianapolis, IN, pp: 401-406.
- Kim, C.W. and J.M.A. Tanchoco, 1991. Conflict-free shortest-time bidirectional AGV routeing. *Int. J. Prod. Res.*, 29(12): 2377-2391.
- Krishnamurthy, N.N., R. Batta and M.H. Karwan, 1993. Developing conflict-free routes for automated guided vehicles. *Oper. Res.*, 41(6): 1077-1090.
- Le-Anh, T. and M.B.M. De Koster, 2006. A review of design and control of automated guided vehicle systems. *Eur. J. Oper. Res.*, 171(1): 1-23.
- Lin, L. and M. Gen, 2009. Priority-Based Genetic Algorithm for Shortest Path Routing Problem in OSPF. In: Mitsuo, G., D. Green, O. Katai, B. McKay, A. Namatame, R. Sarker and B.T. Zhang (Eds.), *Intelligent and Evolutionary Systems*. Springer Berlin/Heidelberg, 187: 91-103.
- Nishi, T., Y. Hiranaka and I.E.Grossmann, 2011. A bilevel decomposition algorithm for simultaneous production scheduling and conflict-free routing for automated guided vehicles. *Comput. Oper. Res.*, 38(5): 876-888.
- Smolic-Rocak, N., B. Stjepan and P. Tamara, 2010. Time windows based dynamic routing in multi-AGV systems. *IEEE T. Autom. Sci. Eng.*, 7(1): 151-155.
- Umar, U.A., M.K.A. Ariffin., N. Ismail and S.H. Tang, 2012. Priority-based genetic algorithm for conflict-free automated guided vehicle routing. *Proc. Eng.*, 50: 732-739.
- Vis, I.F.A., 2006. Survey of research in the design and control of automated guided vehicle systems. *Eur. J. Oper. Res.*, 170(3): 677-709.