

Research Article

Rock Burst Monitoring and Early Warning Based on Incremental Learning Method with SVM

Chunfang Wu, Ruisheng Jia and Tao Qiu

College of Information Science and Engineering, Shandong University of Science and Technology, Qingdao, 266590, China

Abstract: The rock burst hazard is a common geological hazard. In this study, we investigate an approach for classification of rock burst situation. This study relies on support vector machine classifier which in the case of less prior knowledge, still has the ability of classification. First we describes the current research work on rock burst monitoring and early warning and reasons for the introduction of support vector machines and later propose support vector machines algorithm and its improvement strategies. The results illustrate that incremental learning method for support vector machine not only requires less prior knowledge, but also without affecting the performance at the same time and training time will be substantially reduced. The method for rock burst monitoring and early warning has exhibited remarkable detection and generalization performance.

Keywords: Classification, early warning, incremental learning method, monitoring, rock burst hazard, SVM classification

INTRODUCTION

Recent years, China's coal mine accidents showed high momentum. Along with the increasing depth of coal mining and the complex of geological conditions, the rock burst hazards has become an important factor in triggering mine geological disaster. The reason that cause the rock burst hazard is extraordinarily complex (Pan *et al.*, 2012; Qi *et al.*, 2011). There are not only geological reasons, but also mining technology as well as people lack of awareness on the mechanism of rock burst and so on.

For the past few years, monitoring systems have been put into used and a significant amount of data have been obtained. Many researchers at home and abroad have attempted to apply time series analysis, neural networks (Gao *et al.*, 2011) and gray model into detecting early warning rock burst areas. However, how to develop a comprehensive system of evaluation and how to control of this hazard is still the urgent subject of the research (Jiang *et al.*, 2010).

With the rapid development of data mining technology, some coal mines have adopted further techniques in order to improve the performance (Song *et al.*, 2010; Gao, 2004; Wang *et al.*, 2004). In this study, support vector machine will be introduced into the field of rock burst monitoring which can be seen as a classification problem, that is, for a given sensor data: what kind of data is normal, what kind of data anomalies. By introducing the support vector machine

to the field of rock burst monitoring, we can make the system in the case of a less priori knowledge, still has good generalization ability.

OVERVIEW OF SUPPORT VECTOR MACHINE CLASSIFIERS

SVMs based on the principle of structural risk minimization are a class of supervised learning algorithms (Xu *et al.*, 2011). SVM algorithm is based on the statistical learning theory and the Vapnik-Chervonenkis (VC) dimension introduced by Vladimir Vapnik and Alexey Chervonenkis (Hang, 2000). Its essential idea is that low-dimensional points in space are mapped into a high dimensional space, so that they become linearly separable, then use the principle of linear division to determine the optimal separating hyperplane so that the points of the separate categories are divided by a clear gap that is as wide as possible (Vapnik, 1995). In high dimensional space, it is a linear division and in the original data space, which often happens that the points to discriminate are not linearly separable.

Consider the classification of two classes of patterns which are linearly separable. Suppose the training data $(x_1, y_1), (x_2, y_2), \dots, (x_i, y_i)$, where $x \in \mathbb{R}^n$ and $y_i \in \{-1, 1\}$. The decision function of the SVM has the form:

$$f(x) = \text{sgn}(\sum_{i=1}^l y_i \alpha_i x \cdot x^T + b) \quad (1)$$

Corresponding Author: Chunfang Wu, Department of Computer Science, Shandong University of Science and Technology, Qingdao, 266590, China

This work is licensed under a Creative Commons Attribution 4.0 International License (URL: <http://creativecommons.org/licenses/by/4.0/>).

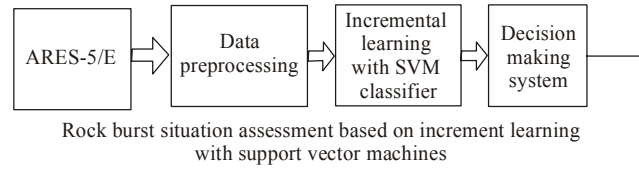


Fig. 1: The model for monitoring and early warning of the rock burst

where, y_i is either 1 or -1 . x^T is the point to be classified, b is constant decided from training. Only a few α_i will be greater than zero. The corresponding are exactly the support vectors (Farquad and Bose, 2012). When the training sets are non-linear, we can map the original sample space to a higher dimensional feature space. Since the inner product is in a relatively high-dimensional space which can't easily lead to the dimensional disaster. The kernel function plays a key role for SVM in many such applications where the training data are not linearly separable:

$$f(x) = \text{sgn}(\sum_{i=1}^l y_i \alpha_i K(x_i \cdot x) + b) \quad (2)$$

The RBF function is usually considered as the most powerful. In the real model, the target classes are not linear separable, the process is usually done using the RBF kernel.

Incremental learning method with SVM: From the data set level, SVM classifier hyperplane location only associate with support vector machines, but not with other unrelated training samples (Takashi *et al.*, 2007). That is, SVM generalization performance does not depend all the training data samples. Usually support vectors are only part of SVM training sample. Using this feature, we can greatly compress the useful data and reduce the training time (Rao *et al.*, 2003). At the same time, it will not bring the problem of declining the classification accuracy.

Therefore, we introduce the incremental learning SVM method, assuming that the training samples is C , specific steps are as follows:

- First, we extract a small set of samples S_0 from a large training set C which can guarantee a certain of classification accuracy and the cost of training time is acceptable. Then the initial classifier F_0 is obtained.
- S_0 is removed from the training set C . The remainder is randomly divided into the same number of mutually exclusive subset₁, subset₂... subset_n.
- Use the initial classifier training F_0 to train subset₁; misclassified sample set is obtained which is called Misclassification Training Samples (MTS).
- Extract support vector from S_0 and merge MTS as a new training sample set, then train with subset₂.

- These cycles until the fault of all subsets of points are added to the initial training set and the final classification is obtained.

Algorithm thought is: Let initial hyperplane of F_0 is L , for any subset of the sample x , x to the hyperplane distance is:

$$r = (f(x))/\|w\| \quad (3)$$

If x is misclassification, it indicates that classifier is not able to properly reflect misclassified sample information and should be absorbed into the training set. If F_0 can be correctly classified and in the $1-\epsilon < |f(x)| < 1+\epsilon$, then retain x , i.e., x is closer to the support vector, ϵ is controllable threshold (Cauwenberghs and Poggio, 2001).

The model for monitoring and early warning of the rock burst: The rock burst intrusion detection system consists of acoustic emission data preprocessing, incremental learning support vector machine and decision making system, as shown in Fig. 1.

The entire model can be divided into two processes: the training phase and the testing phase. The training applies the incremental support vector machine to train data in order to obtain the optimal separate hyperplane and its corresponding parameters. During the test phase, the data is processed as the input of the incremental support vector machine and then according to the above theory formula, the likelihood of rock burst is obtained.

EXPERIMENTS

In this study, we address feature parameters from acoustic emission sensor to determine possible rock burst hazard. Where rock burst is defined as two kinds of situation states: normal and dangerous. The input parameters of incremental support vector machine includes energy, wave hit (event) counts, big event rate of the acoustic emission, the total number of ringing, m value method (Li *et al.*, 2008).

During the experiment, we select sound monitoring sensor data from a coal mine in May 2011 and preprocess through method of PCA and normalization. We extract 90% of sample set from the sound sensor as a training set and the remainder samples as a test set.

Table 1: Comparison of two methods

σ^2	SVM-type	SV. total	t	Accuracy (%)	G-means (%)
0.0001	SVM-standard	825	253.74s	71.46	74.00
	SVM-inc	678	183.54s	78.46	79.65
0.001	SVM-standard	810	260.93s	77.18	78.20
	SVM-inc	658	173.66s	77.42	78.62
0.0001	SVM-standard	730	232.84s	77.48	79.36
	SVM-inc	642	169.23s	78.56	80.42
0.00001	SVM-standard	699	242.53s	76.00	77.30
	SVM-inc	631	156.85s	77.49	77.80
0.000002	SVM-standard	678	252.50s	75.60	75.80
	SVM-inc	621	150.23s	76.86	77.04

Using the third part of the introduction of the incremental learning method, 10% of the training set is as the initial training set S_0 , the remaining part of the collection is divided into several disjoint small collections.

The results in Table 1 show comparison results between the standard SVM and incremental learning method SVM. (Which SVM-standard represents the standard support vector machines and SVM-inc represents the incremental learning support vector machine).

As can be seen from Table 1, compared with standard support vector machine, the incremental support vector machine learning methods can maintain accuracy and g-means slightly higher. As the number involved in the training of support vector machine reduces, the use of training time is less than 2/3 of the standard support vector machine. It proves that the incremental support vector machine has a shorter training time, higher accuracy and g-means. And it proves the algorithm is efficient. And when $\sigma^2 = 0.0001$, we can obtain the optimal hyperplane constructed with the best classification results, with σ^2 values continue to decrease although the algorithm reduces training time, it also brought the problem of declining accuracy rate due to decline in the number of support vectors.

CONCLUSION

Based on the support vector machine, we propose a strategy based on incremental learning method and apply it to the rock burst monitoring and warning areas. Conclusions are as follows:

- By preserving the original support vector and classifier misclassification, it can greatly reduce the number of support vectors, which can improve the classification accuracy and g-means at the same time and training the time is shortened.
- Simulation example results prove that the proposed incremental learning method support vector machine is validity, reliability, easy to implement and thus it provides a practical ideas and methods in the field of engineering practice.

ACKNOWLEDGMENT

In this study, the research was sponsored by the Nature Key Technology R and D Program of the Ministry of Science and Technology of P.R. China (No. 2012BAK04B06).

REFERENCES

- Cauwenberghs, G. and T. Poggio, 2001. Incremental and Decremental Support Vector Machine Learning [C]. Advances Neural Information Processing Systems (NIPS 2000). MIT Press, Cambridge, MA.
- Farquard, M.A.H. and I. Bose, 2012. Preprocessing unbalanced data using support vector machine [J]. *Decis. Support Syst.*, 74(10): 1585-1594.
- Gao, M.S., L.M. Dou, R.L. Yan, C.L. Han and Y.S. Guo, 2011. Prevention mechanism of roadway supported by bolt-mesh subjected to rock burst and degree calculation. *J. Min. Safe. Eng.*, 16(3): 114-119.
- Gao, W., 2004. Time serial model of rock burst based on evolutionary neural network. *J. Explos. Shock Waves*, 24(6): 524-528.
- Hang, X., 2000. Introduction to statistical learning theory and support vector machines. *J. Actautmatica Sinica*, 26(1): 32-43.
- Jiang, F.X., X.H. Miao, C.W. Wang and J.H. Song, 2010. Predicting research and practice of tectonic-controlled coal burst by misoseismic monitoring. *J. China Coal Soc.*, 35(6): 900-904.
- Li, Z., L. Dou and C. Lu, 2008. Study on fault induced rock bursts [J]. *J. China Univ., Min. Technol.*, 18(3): 321-326.
- Pan, J.F., Y. Ning, H. Du, T.T. Lan and Y. Zhang, 2012. The theory and system for preventing rock burst rock burst in large-scale areas. *J. China Coal Soc.*, 37(11): 1803-1810.
- Qi, Q.X., H.Y. Li and J.F. Pan, 2011. Stress control theory and practice of rock-burst prevention. *Coalmining Technol.*, 16(3): 114-119
- Rao, X., C. Dong and S. Yang, 2003. Application of time-frequency analysis and support vector machine to on the fault diagnosis for diesel valve train. *J. Softw.*, 2003(4): 798-803.

- Song, W.Y., Y.S. Pan and R.H. Su, 2001. Forecast and chaos model of rock burst. *J. China Coal Soc.*, 26(1): 26-30.
- Takashi, O., M. Hiroshi and Y. Seiji, 2007. SVM-based interactive document retrieval with active learning [J]. *New Generat. Comput.*, 26(2008): 49-61.
- Vapnik, V.N., 1995. *The Nature of Statistical Learning Theory*. Springer-Verlag, New York.
- Wang, C., Y. Zhu and Y.X. Zhang, 2004. Application of time-frequency analysis and support vector machine to on the fault diagnosis for diesel valve train. *T. Csice*, 22(3): 245-252.
- Xu, Q., S. Geng and J. Shi, 2011. Fault diagnosis method for aero-engine based on SVM with large-scale training set. *J. Aerospace Power*, 26(12): 2841-2848.